



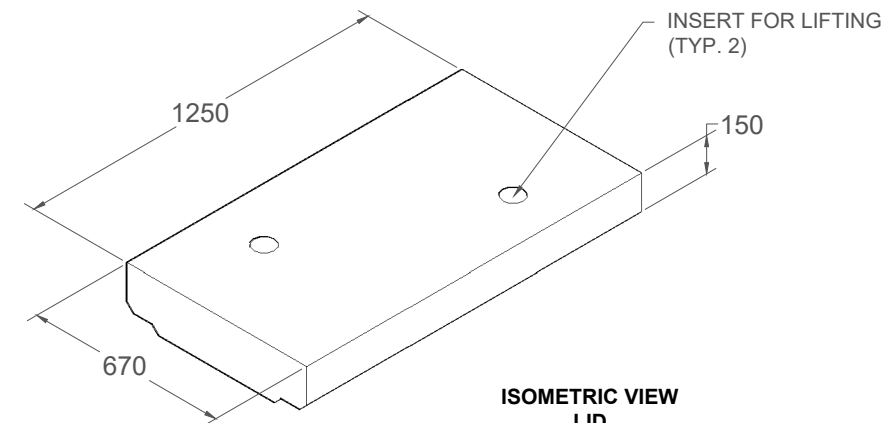


**ISOMETRIC VIEW  
LID**  
1250mm x 670mm x 150mm  
340 KG


STEEL CONNECTION PLATE  
GALV. OR S.S.  
(TYP. 2 PER TROUGH)

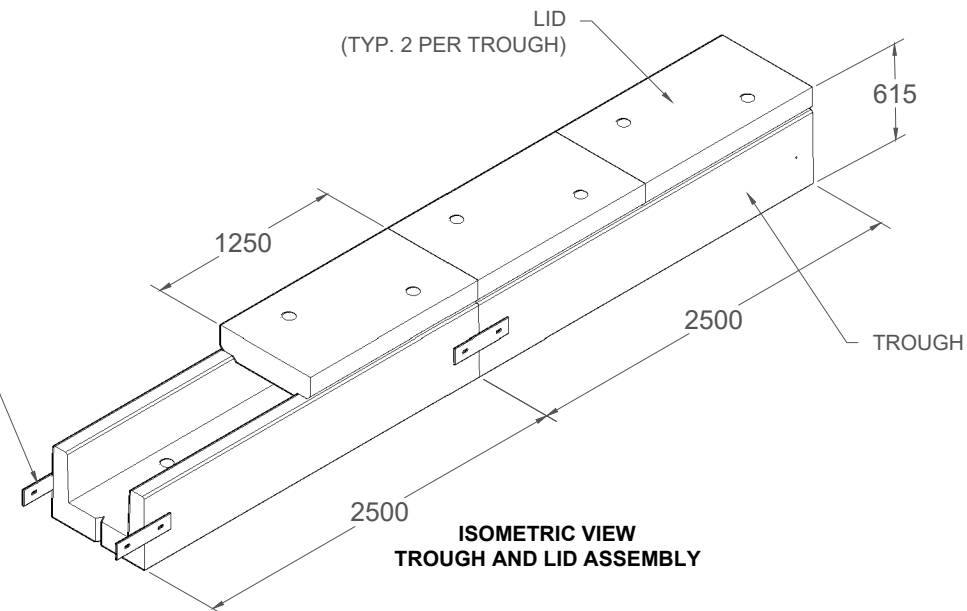

**ISOMETRIC VIEW  
TROUGH AND LID ASSEMBLY**

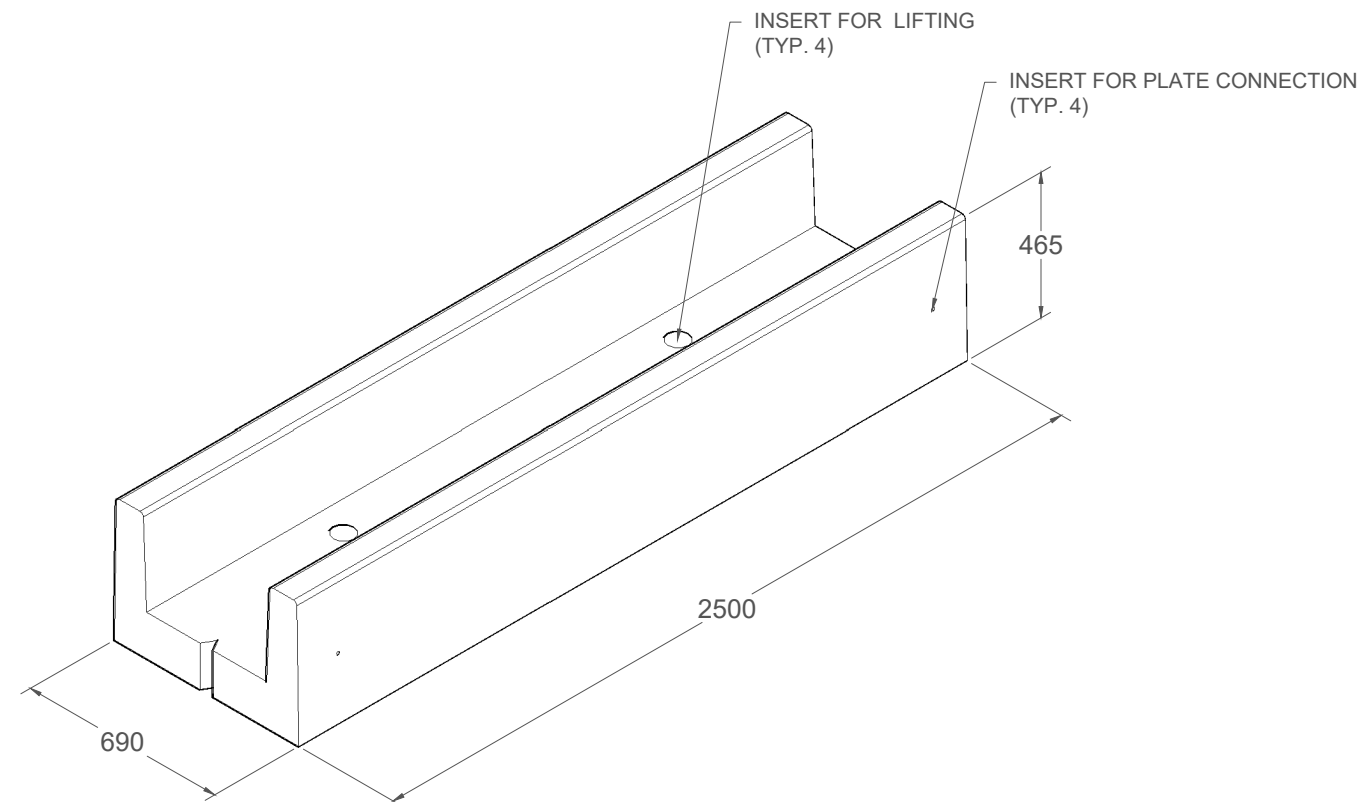

**ISOMETRIC VIEW  
TROUGH**  
2500mm x 690mm x 465mm  
1030 KG

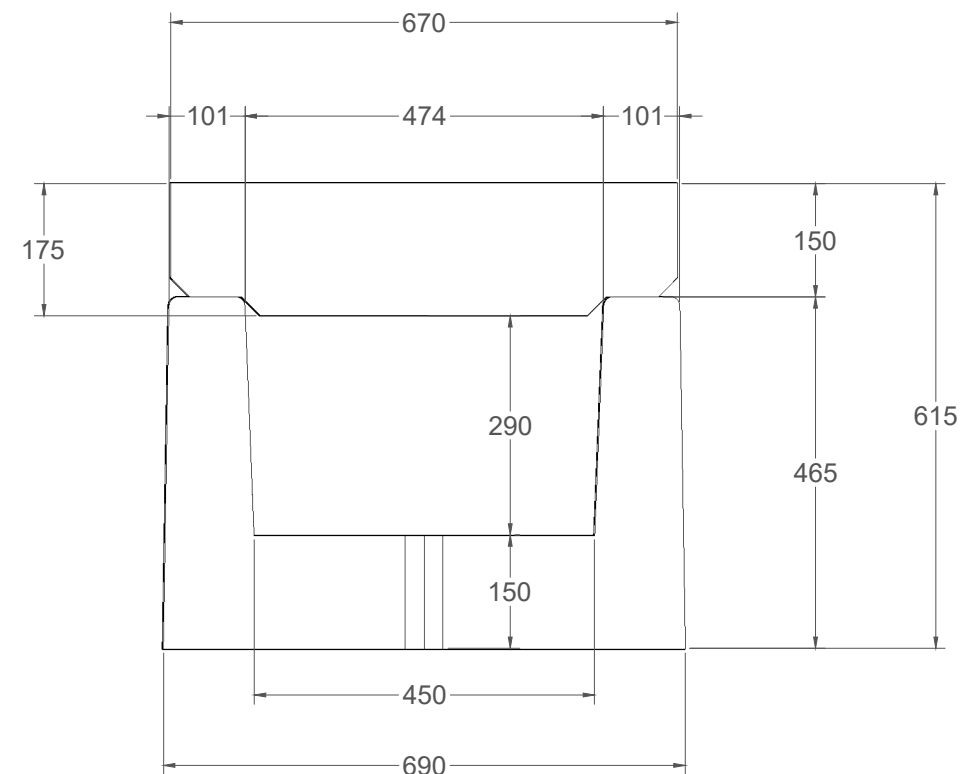

**SECTION VIEW**

**NOTES:**

ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.

DO NOT TO SCALE.

STANDARD AND NON-CONDUCTIVE DIVIDERS AVAILABLE UPON REQUEST.

DUCT OPENINGS AVAILABLE UPON REQUEST.

BROOM FINISH ON LID AVAILABLE UPON REQUEST.

**SPECIFICATIONS:**  
PRODUCT DESIGNED IN ACCORDANCE WITH CSA A23.3

**PRODUCTION:**  
IN ACCORDANCE WITH CSA A23.4

**CONCRETE:**  
IN ACCORDANCE WITH CSA A23.1  
28 DAY COMP. STRENGTH: 35MPA, AIR ENTRAINMENT 5-8%

**REINFORCING:**  
IN ACCORDANCE WITH WITH CSA G30.18  
GRADE 400W

# ANCHOR TROUGH - 450 x 290



1645 SYDENHAM RD.  
KINGSTON, ON

PHONE:  
(800) 223-0012  
1-613-546-6683

WWW.ANCHORCONCRETE.COM